

PPCM-650 | PIPE PROFILE CUTTING MACHINE

The CNC controlled Pipe Profile Cutting Machine allows 3D cutting/beveling using oxy-fuel or plasma.

Advanced design and top quality components enable fast and efficient cutting with top quality results.


The most important feature and advantage of PPCM-650 is its user friendly software including a wide scope of standard macros representing the typical cutting shapes. Integrated library of macros allows for parametric definition of typical pipe joints and fast shape programming on-site directly from machines' control panel just after a short training.

Off-line programming is also possible by means of dedicated PPCM SIM PC software containing the same macros library.

Pipe joints can be prepared remotely in the office to keep machine operating, increasing process efficiency and reducing downtime.



Pipe OD
50 to 650 mm (2-26")



Max. pipe length
6 or 12 m



Pipe weight
up to 3 000 kg



Wall thickness:
3 - 50 mm



Max. cutting angle:
45 degree

Important features:

- User friendly software including library of macros for most typical cutting shapes
- Automatic compensation of cutting speed depending on the material thickness, torch angle and cutting direction for the best cutting quality
- Heavy duty rigid construction
- Well proven in most demanding environments
- Easy access to gas valves
- Fume exhaust system thru spindle (option)
- Additional torch to heat up the material (option)

 3D Oxy-fuel cutting
Acetylene (standard)
Propane (option)

 3D Plasma cutting
(option)




CAD/CAM file transfer thru
Lantek Flex 3D Tubes
(option)


Machines' software

I. PPCM-650 software includes a wide scope of standard macros.


The macros present the typical cutting shapes and are easily programmable thanks to intuitive menu with necessary pipe parameters.

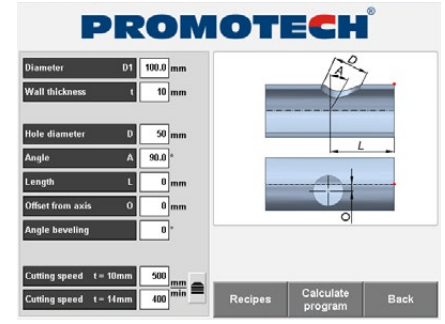


Typical cutting shapes:




Pipe - plane




Pipe - plane




Pipe-plane with holes for fins




Pipe - planes




Pipe - elbow




Pipe - joint




Rectangular pad



Reinforcement pad



Compound cut



Round hole with bevel




Promotech can expand the macro library upon customer's request.

II. PPCM SIM PC / Off-line programming

Thanks to PPCM standard macros library you can work remotely on your projects.

Main features of PPCM SIM PC:

- all the macros from the PPCM library are also available on the PC
- time efficiency - when the PPCM machine is used for cutting, next project can be prepared on the PC in the meantime
- easy transfer between PC and PPCM machine using USB stick
- stand-alone application
- simple and user-friendly software

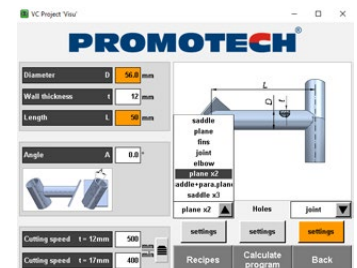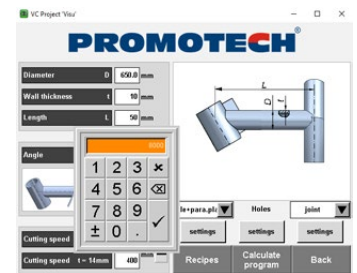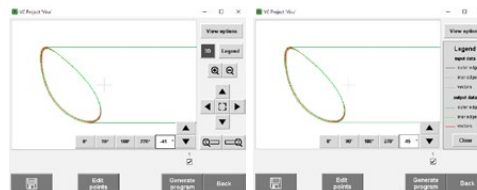

On-line support



Built-in network router enables remote access to machine interface (VNC Network)




Cable connection or WiFi (option)



Compatible with mobile and desktop devices



On-request software updates and machine diagnostics

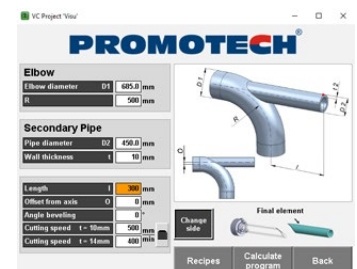


Lantek Flex 3D Tubes software for CAD/CAM file transfer (option)

This software being customized for PPCM enables a simple way of generating the CNC code necessary to cut complex pipe intersection shapes. Lantek Flex 3D Tubes software is a perfect tool to import CAD geometry, design tubes using a set of standard shapes, or construct them from 2D outlines and generate them with any type of contour projected through the tube.



Main benefits of optional Lantek Flex3d Tubes software


I. Import of CAD geometry from external software and acceptance of various file types including Tekla, SAT, STEP, IFC, Excel

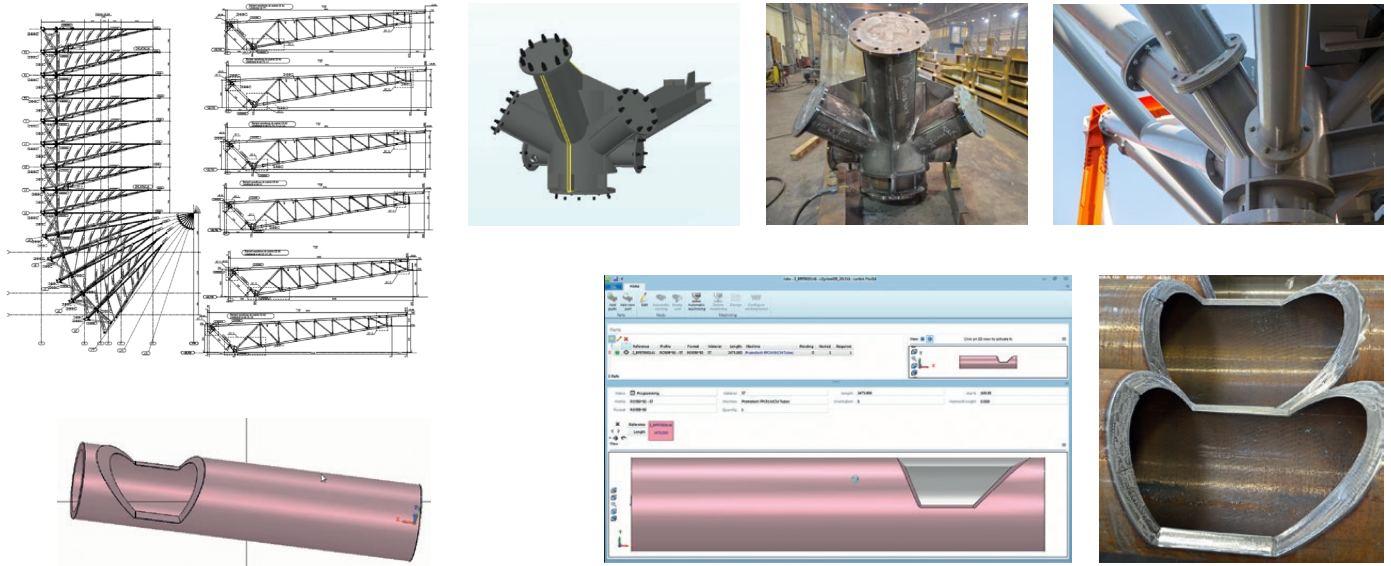


II. Designing of tubes and joints using a set of standard shapes or construction them from 2D outlines




III. Visualization of joints and torch path adjustment to optimize weld preparation



Joint cutting w/o beveling




Joint cutting with beveling

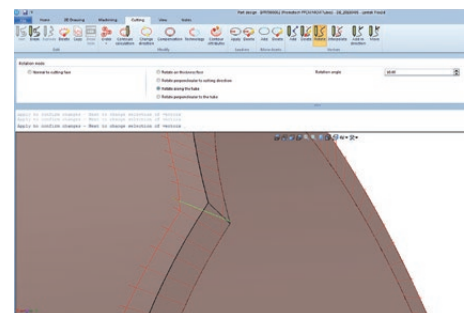

Torch path adjustment

IV. Auto Nesting of multiple parts

Lantek automatic nesting system determines the most efficient position of elements to be cut from pipes, thus minimizing waste of material as well as facilitating managing the warehouse of pipes.

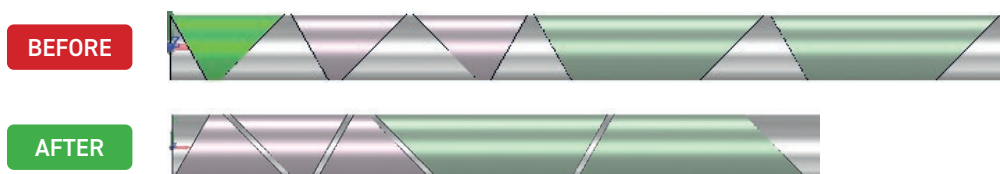


Options available upon customers' requests

I. Oxy-fuel cutting (Propane)

Alternative cutting method that is available on request.

II. Plasma Cutting

We can integrate plasma source preferred by customer.



III. Fume exhaust system

Fume exhaust system with electric adjustment of dirty air level, combined with PPCM-650 spindle provides customer with effective fume removal.



PPCM-650 TECHNICAL SPECIFICATION	
Pipe OD diameter	50 - 650 mm (2-26")
Max. pipe length	6 or 12 m (19 or 39 ft.)
Pipe weight	up to 3 000 kg
Wall thickness	3 - 50 mm
Max. cutting angle	45 degree
Cutting method	Oxy-Acetylene Oxy-Propane (Option) Plasma (Option)
Ignition: Oxy-fuel / Plasma	Manual / Automatic
Pipe support	2 pcs for up to 6-meter long pipes 4 pcs for up to 12-meter long pipes Additional supports on request
Vertical oval compensation mechanism	Included
Airconditioning of control cabinet	Available as Option
Menu language	English, Croatian, Finnish, French, Russian, Turkish Other languages on request
Fume exhaust system	Available as Option
Auto nesting of multiple parts	Available as Option
Transfer of NC data from CAD: Tekla files, SAT, STEP, IFC, Excel etc. files thru LANTEK flex 3D	Available as Option



Mitglied im DVS - Deutscher Verband für Schweißen und verwandte Verfahren e. V.



All information is subject to change without notice. 20.04



PROMOTECH Sp. z o.o.
ul. Elewatorska 23/1, 15-620 BIAŁYSTOK, POLAND
tel. (+48 85) 678 34 05, fax (+48 85) 662 78 77
marketing@promotech.eu www.promotech.eu

Your local dealer:

